


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 24 TOWNSHIP 16 RANGE 4
DATE: 5-9-2000 9-27-06
PARTY CHIEF: Wilcoxon
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County: 9-17-95

IN. S.P.C. E ZONE, NAD 83
NAME: 16042404
N: 507424.0900(m)
E: 67545.2240(m)

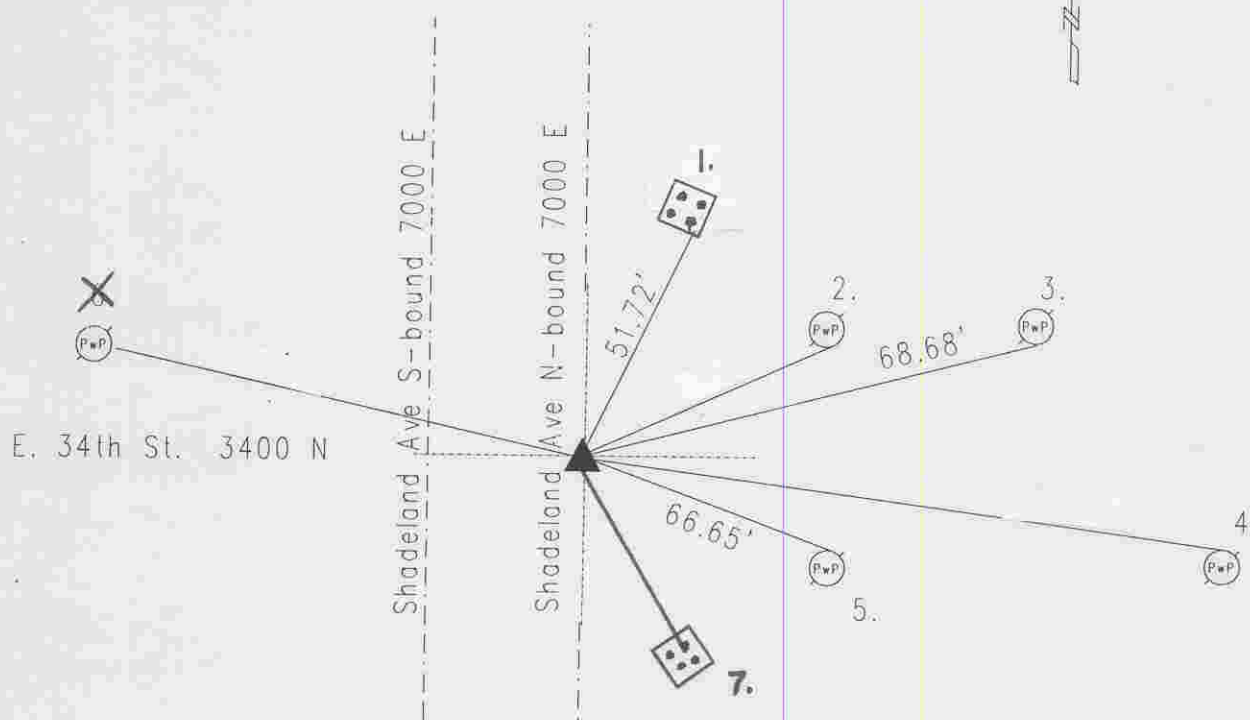

Original post set 1820 by Hendricks with witnesses: 24" beech S 47 E 29 links, 36" poplar N 43 W 24 links per Marion County Atlas pg. 11. Hosbrook 7-21-1849 called rock set with both original witnesses standing per Warren Township Legal Survey Book pg. 3. Hosbrook after 1849 called rock fd w/both witnesses standing per Warren Township Legal Survey Book pg. 4. Woerner 6-18-48 called a brass pin. Monroe 4-13-60 called brass plug. Wilcoxon 3-4-76 called the same. Gries 12-4-87 called the same. Wilcoxon 9-17-95 called the same. Excavated 8/96 by Wilcoxon and set Harrison. Re-tied 5-9-2000 by Wilcoxon. HC642404

REF.	DISTANCE	DESCRIPTION
1.	51.72'	Cut 'x' S-most bolt of traffic signal pole base
2.	52.63'	PK ^{mag} nail S PwP#178-418B 10"up
3.	68.68'	PK nail SE PwP no # 12"up
4.	124.62'	PK ^{mag} nail N PwP#84-448A 20'up
5.	66.65'	PK nail NE PwP#3188-448A 24"up
6.	99.56'	Mag nail w/brass washer E PwP#106-417B 14"up
7.	62.37'	Cut 'x' N bolt of a aluminum pole base